

RUBINETTO ROTALOCK REVOLUTION - CORPO IN OTTONE - ATTACCO A SALDARE P355N PER SERBATOIO
 ROTALOCK REVOLUTION VALVE – BRASS BODY – P355N WELD CONNECTION FOR TANK

RUBINETTO A SFERA ROTALOCK CON TECNOLOGIA REVOLUTION - ATTACCO A SALDARE P355N PER SERBATOIO - CORPO IN OTTONE
 CW614N-OT58 - O.RING IN EPDM 100% PFAS-FREE CERTIFICATO OLAB

ROTALOCK BALL VALVE WITH REVOLUTION TECHNOLOGY – P355N WELDING CONNECTION FOR TANK – BODY IN CW614N-OT58 BRASS
 - 100% PFAS-FREE OLAB CERTIFIED DOUBLE EPDM O.RING



CARATTERISTICHE

PS : 150 bar
 TS : -50°C ÷ +150°C

- Corpo rubinetto a sfera in ottone CW614N-OT58
- Attacco con flangia a saldare P355N per serbatoio
- Flangia con tasca ODF in ottone CW614N-OT58
- Flangia girevole in CW614N-OT58
- Flangia di chiusura in CW614N-OT58
- Stelo di manovra in acciaio inox
- Sfera in ottone
- O.Ring IN EPDM 100% PFAS-FREE certificato OLAB
- Doppio O.Ring in ogni possibile punto di perdita
- Viti di fissaggio delle flange esterne in acciaio inox classe A4-80 con rosette antisvito in acciaio inox sulle flange
- Seggi di tenuta in PTFE
- Perno di fermo rotazione stelo in acciaio inox

VANTAGGI

- Valvola interamente realizzata con macchine ad altissima precisione
- Nessuna saldatura sul corpo valvola che potrebbe creare nel tempo problemi di tenuta
- Particolari assemblati tra loro con viti in acciaio inox classe A2
- Robusta e ideale per il funzionamento a pressioni elevate (150 bar garantiti)
- Doppio O.Ring ad ogni possibile punto di perdita per una perfetta tenuta
- Utilizzabile con qualsiasi liquido refrigerante (con O.Ring in HNBR o EPDM)
- Facilità di montaggio e di sostituzione, senza tagliare nessun tubo di collegamento.

EPDM 100% PFAS-FREE compound specifico per utilizzo con gas refrigerante R744 (CO₂)

GENERAL FEATURES

PS: 2175 psi
 TS: -58°F ÷ 302°F

- Ball valve body in CW614N-OT58 brass
- Weld-on flange connection P355N for tank
- Flange with ODF pocket in CW614N-OT58 brass
- Swivel flange in CW614N-OT58 brass
- Closing flange in CW614N-OT58 brass
- Stainless-steel operating stem
- Brass ball
- EPDM O.RING 100% PFAS-FREE, OLAB certified
- Double O.RING at every possible leakage point
- External flange-mounting screws in A4-80 stainless steel with anti-loosening stainless-steel washers on the flanges
- PTFE sealing seats
- Stainless-steel stem rotation stop pin

ADVANTAGES

- Valve entirely made using ultra-high-precision machines
- No welding on the valve body that could create sealing problems over time
- Parts assembled together with class A2 stainless steel screws
- Robust and ideal for operation at high pressures (150 bar guaranteed)
- Double O.Ring at each possible leakage point for a perfect seal
- Can be used with any refrigerant gas (with HNBR or EPDM O.Ring)
- Easy installation and replacement without cutting any connecting pipes.

100% PFAS-FREE EPDM specific compound for use with R744 (CO₂) refrigerant gas

REvolution ROTA LOCK

100%



NO WELDING, NO LEAKAGE, JUST PERFORMANCE

SPECIAL FEATURES

-  NO SALDATURE STRUTTURALI
NO STRUCTURAL WELDS
-  PERFETTA TENUTA: DOPPIO O.R. IN EPDM CERTIFICATO OLAB 100% PFAS-FREE
PERFECT SEALING: DOUBLE OLAB CERTIFIED 100% PFAS-FREE EPDM O.R.
-  MASSIMA SICUREZZA A 150 BAR / 2175 PSI - COEFFICIENTE DI SICUREZZA 3 (450 BAR)
MAXIMUM SAFETY AT 150 BAR / 2175 PSI SAFETY FACTOR 3 (450 BAR)
-  SOSTITUZIONE RAPIDA E SICURA SENZA TAGLIARE TUBI O RISALDARE
QUICK AND SAFE REPLACEMENT WITHOUT CUTTING OR RE-WELDING PIPES
-  OLAB RIGENERA LA TUA VALVOLA A FINE CICLO VITA
OLAB REGENERATES YOUR END-OF-LIFE VALVE

= SAFETY, SUSTAINABILITY AND ECONOMIC SAVINGS



RUBINETTO ROTALOCK REVOLUTION - CORPO IN OTTONE - ATTACCO A SILDARE P355N PER SERBATOIO
 ROTALOCK REVOLUTION VALVE – BRASS BODY – P355N WELD CONNECTION FOR TANK

PS : 150 bar PS: 2175 psi
 TS : -50°C ÷ +150°C TS: -58°F ÷ 302°F


RUBINETTO A SFERA ROTALOCK CON TECNOLOGIA REVOLUTION - ATTACCO A SILDARE P355N PER SERBATOIO - CORPO IN OTTONE
 CW614N-OT58 - O.RING IN EPDM 100% PFAS-FREE CERTIFICATO OLAB

ROTALOCK BALL VALVE WITH REVOLUTION TECHNOLOGY – P355N WELDING CONNECTION FOR TANK – BODY IN CW614N-OT58 BRASS
 - 100% PFAS-FREE OLAB CERTIFIED DOUBLE EPDM O.RING



P355N

ODF

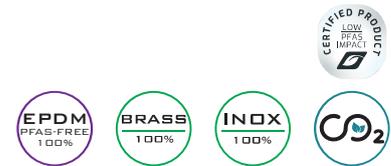

Codice Code	Dn (mm)	ODF	Ø (mm)	Conf. Pack.	Lotto min. Min. lot
K10245-06-18-L	18	7/8"			150
K10245-M22-24-L	24		22		150
K10245-09-24-L	24	1" 3/8	35		150

